



S500 Intelligent Gas Sensor

- Microprocessor based
- 4-20mA Analogue Output
- Voltage free relay contacts
- RS485 digital interface
- Alphanumeric dot-matrix display
- “One Person” calibration
- Small size
- Certified Ex'd's IIC T6
- Low power consumption
- Standalone operation




The Monicon S500 is a high quality, self contained, Intelligent gas sensor that offers host of sophisticated features to provide fast, reliable warnings against explosive concentrations of combustible gases.

The S500 will operate as a standalone instrument or in conjunction with a controller or a computer. The S500 is housed in an attractive, compact diameter enclosure and may be configured or calibrated by one person, without declassifying the hazardous area. The gas concentration is indicated on a 4-character alphanumeric display which also indicates instrument status. The S500 is fully user programmable and no physical adjustments are necessary during calibration as the on-board computer assists the calibration procedure. All user variables are stored in non-volatile memory (EEPROM) and retained indefinitely even during total power failure.

Typical Applications for the S500

- Oil refineries
- Chemical processing
- Offshore platforms
- Gas processing
- Oil and gas storage depots
- Gas pipelines
- Tank farms
- Laboratories
- Petrochemical industry

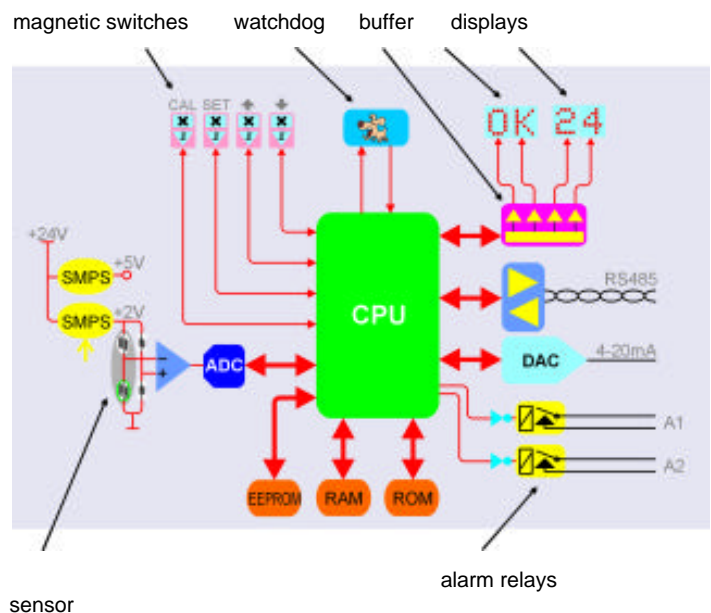


The S500 uses the proven Monicon CGS500 thermocatalytic sensor combined with advanced, surface-mount microprocessor and firmware technology. Combustible gas oxidising on the surface of a thermocatalytic element causes an imbalance in a Whetstone bridge circuit. This imbalance is amplified to give a voltage proportional to the gas concentration. This voltage is then processed by the CPU. A watchdog circuit monitors the system operation and resets the CPU if a failure is detected.

The S500 is calibrated or user-programmed by activating the magnetic switches with a magnet. The operator is then guided through a variety of options by a user-friendly menu. The CPU constantly verifies system operation. In the unlikely event of a fault, the operator is alerted with a helpful diagnostic display.

S500 Specifications

Supply voltage	Nominal 24Vdc (operates from 20Vdc to 35Vdc)
Power consumption	2W nominal, 2.3W maximum
Circuit protection	1A Electronic Fuse (Auto reset)
Transient Protection	PCB mounted, 7 Joule, Metal Oxide Varistor
Analogue output	4-20mA referenced to 0V
Analogue output load	500W maximum
Preconditioning Requirements	Operational: 30 seconds, Specification: 60 minutes
Storage temperature	-20°C to +66°C
Full-Scale range	0 - 100% LEL
Operating temperature	-18°C to +50°C (-18°C to +40°C in hazardous area)
Response time (T90)	Typically <15 seconds
Operating RH range	10-90% RH non condensing
Drift, S.T.P. continuous duty in air	<7% over three months (complies with EN50057)
Linearity	±5%
Repeatability	±2%
Resolution	1%
Sensor life	Typically 5-7 years
Weight	1.8Kg (including sensor)
RS485 operating mode	Slave mode, half duplex, polled
Max. units on RS485 loop	100
RS485 comm parameters	2400-N-8-1
RS485 error checking	1 byte checksum
Unit interrogation time	40mS
Relay contacts	SPST, NO, 125V @ 0A5 (30V DC @ 1A) each for A1 & A2
Electromagnetic Conformance (EMC)	Complies with EN50081 and EN50082
Recommended calibration flow rate	300mL per minute
Mounting holes	2 holes, diam 8mm, spaced 82.5mm
Cable gland entries	2 entries, each M20 x 1.5
Terminations	PCB mounted terminal blocks to accept 1.5mm ² cable
Enclosure material	Sand-cast, copper-free aluminium with blue epoxy finish.

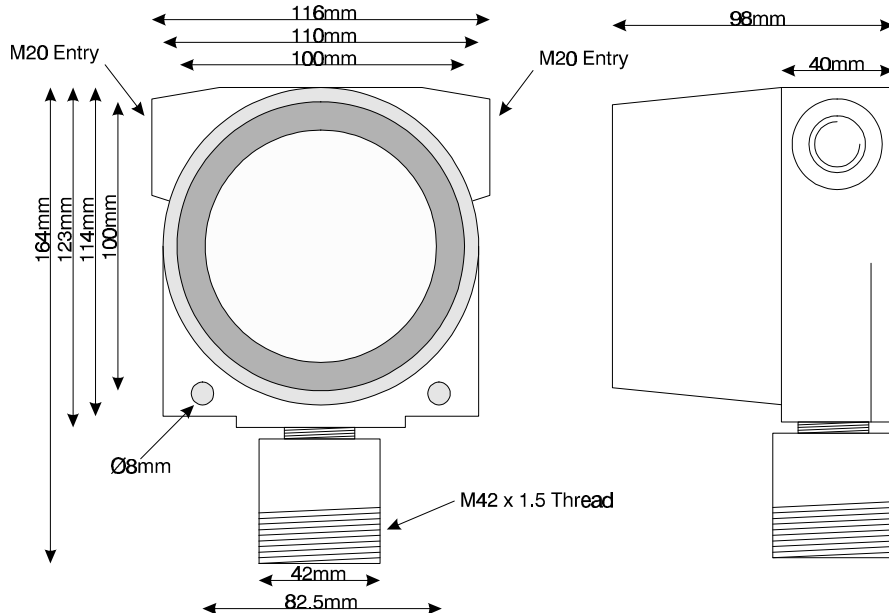

Monicon Technology Ltd
 Riverside Industrial Estate
 Tuam Road
 Galway
 Ireland

Tel: +353 91 752884
 Fax: +353 91 752886
 e-mail: sales@monicon.com
 web-site: www.monicon.com