

GENERAL PURPOSE INDICATOR

LOOP POWERED WITH VERY LARGE DIGITS



D-Series advantages

- Unique, robust IP66, IP67 (NEMA4X) panel mount front enclosure made of die cast aluminum, allowing even **big jets** of water and **total immersion**.
- Programming can be done by your own crew with the exact same, plain and sensible menu-driven structure like the F-Series, saving cost and irritation. **Know one, know them all!**

Features

- Universal input loop powered indicator.
- Very large 26mm (1") high digits.
- Displays the actual value, measuring unit and loop current.
- Selectable on-screen engineering units: %, PPM, meter, m, cm, mm, ft, sqft, ML, L, NL, M³, nM³, GAL, USGAL, IGAL, bbl, CUFT, mg, g, kg, ton, lb, psi, psig, mbar, bar, barg, °C, °F, K, P, RPM, K, KPA, pH, mV, /sec, /min, /hr, /day or no unit (others on request).
- Piegraph indication: ten segments.
- LED backlight option.
- Operational temperature -40°C to +80°C (-40°F to 176°F).

Signal input

- 4 - 20mA.

Power supply

- Input loop powered.

Applications

- The D-Series is a DIN-sized display and the **better alternative** for your existing, not waterproof, front panel mount indicators in extreme weather outdoor applications or e.g. in food industries where working environments are often cleaned with powerful water jets.
- The Dogo takes operating energy from an input current (2-wire 4 - 20mA) and **reduces installation cost**. It accepts a wide range of process instruments, including flow (linear or square root), level, pressure and temperature transmitters. All these process parameters can be displayed in their own engineering units. Alternative field mounted model: Fogo.

General information

Introduction

The Dogo is a local, panel mount indicator to display the actual process value, range and loop current. The measuring unit to be displayed is simply selected through an alphanumeric configuration menu. No adhesive labels have to be put on the outside of the enclosure: a weather proof and user friendly solution! The configuration of Span, offset and number of decimals is done through software functions, without any sensitive dip-switches or trimmers.

Display

The display has 5½ large 26mm (1") digits to show the main process information. At the bottom line, smaller 8mm (0.31") alphanumeric digits are available to display the measuring unit and additional messages in case of an alarm; range error e.g. With the piegraph, an actual range indication is offered in a single glance. If desired, additional information can be presented after pressing the select key, like the actual loop current and the 0% and 100% process value. The display is a transfective type, which means that a high contrast reading is guaranteed, even in full sunlight. The Dogo has a smart display update function incorporated. Related to the lower temperatures, the update frequency of the LCD is tuned automatically to achieve a readable display even at -40°C / -40°F.

Backlight

For those applications where readability during day and night might be an issue, a bi-color backlight is available. The background color can be set to green or amber and the intensity can be adjusted in the configuration menu.

Configuration

All configuration settings are accessed via a simple operator menu which can be pass-code protected. Each setting is clearly indicated with an alphanumeric description, which avoids confusing abbreviations and baffling codes. Once familiar with one D-series product, you will be able to program **all models in all series** without a manual. All settings are safely stored in EEPROM memory in the event of sudden power failure.

Signal input

The Dogo does accept 4 - 20mA input signals only. The input signal type can be tuned and set by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches, jumpers or trimmers.


Power supply

The Dogo is designed to be a loop powered indicator, which means it takes its operating energy from an input current (2-wire 4 - 20mA).


Enclosures

The Dogo is supplied in a unique, robust IP66, IP67 (NEMA4X) class panel mount front enclosure made of die cast aluminum, based on a popular DIN sized enclosure of 144 x 72mm. The front enclosure withstands powerful water jets and even total immersion. The maximum thickness of the panel is 6mm (¼"). The D-Series is the better alternative for your existing, not waterproof, front panel mounted indicators.


Overview application Dogo

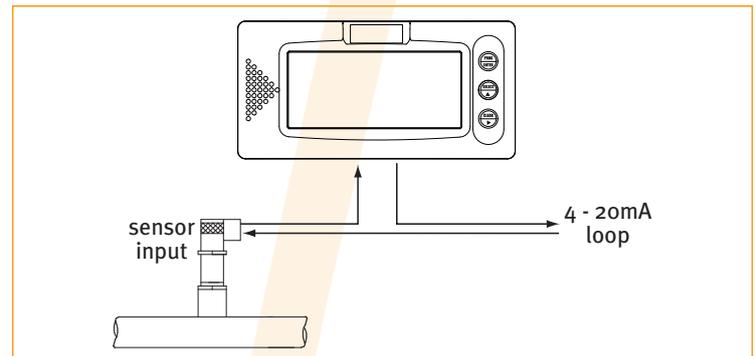


Display example Dogo

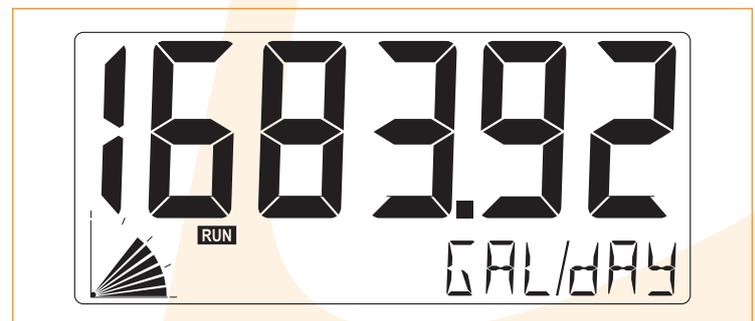

Terminal connections Dogo

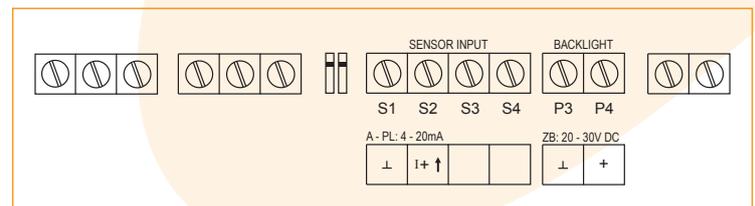


Dimensions enclosure

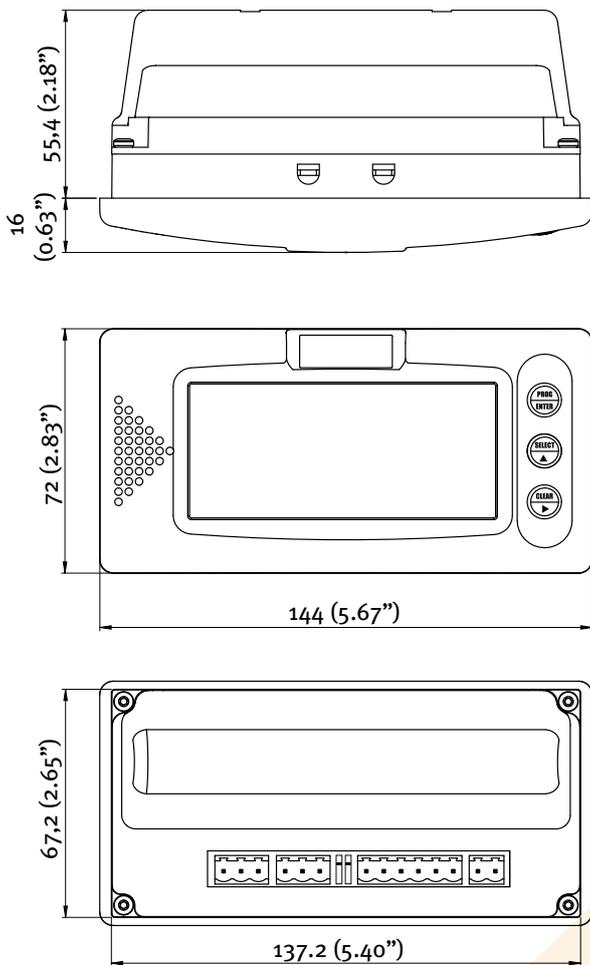

Dimensions according DIN 43700 / IEC 61554

Dimensions panel cut-out

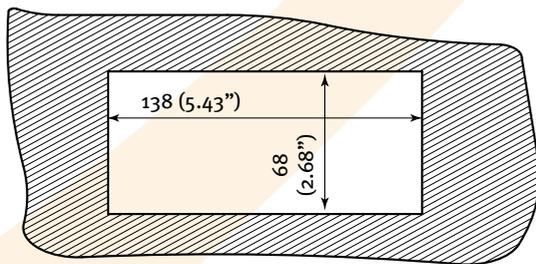

Maximum panel thickness: 6mm (1/4")

Technical specification

General

| Display | |
|------------|--|
| Type | High intensity reflective numeric and alphanumeric LCD, UV-resistant. |
| Dimensions | 90 x 40mm (3.5" x 1.6"). |
| Digits | 5½ very large 26mm (1") and eleven 8mm (0.31") digits. Various symbols and measuring units. |
| Piegraph | 10 segment range indication in relation to its measuring range 0 - 100% |
| Option ZB | Transflective LCD with bi-color LED-backlight; green / amber. Intensity and color can be adjusted in the configuration menu. |

Piegraph

| | |
|----------|---|
| Digits | 10 segments. |
| Relation | To the min. and max. input signal (0 - 100%). |

Operating temperature

| | |
|---------------|-----------------------------------|
| Standard unit | -40°C to +80°C (-40°F to +176°F). |
|---------------|-----------------------------------|

Power requirements

| | |
|---------|--|
| Type PL | Input loop powered from sensor signal 4 - 20mA |
| Type ZB | For backlight 20 - 30V DC. Power consumption max. 1 Watt. |

Data protection

| | |
|-----------|--|
| Type | EEPROM backup of all settings. Data retention at least 10 years. |
| Pass-code | Configuration settings can be pass-code protected. |

Environment

| | |
|-------------------------------|--|
| Electromagnetic compatibility | Compliant ref: EN 61326 (1997), EN 61010-1 (1993). |
|-------------------------------|--|

Casing

General

| | |
|--------------|---|
| Window | Polycarbonate window. |
| Sealing | Silicone. |
| Control keys | Three industrial micro-switch keys. UV-resistant silicone keypad. |

Panel mount enclosure

| | |
|-----------------|--|
| Dimensions | 144 x 72 x 71.4mm (5.67" x 2.83" x 2.81") - W x H x D according DIN 43700 / IEC 61554. |
| Panel cut-out | 138 x 68mm (5.43" x 2.68") L x H. |
| Material | Die-cast aluminum front panel + GRP back enclosure |
| Protection | IP66, IP67 (NEMA 4X) at the front-side. |
| Weight | 325 gr. |
| Panel thickness | Max. 6mm (1/4"). |

Signal input

Sensor

| | |
|--------------|---|
| Type A | 4 - 20mA. Analog input signal can be scaled to any desired range within 4 - 20mA. |
| Accuracy | Resolution: 16 bit. Error < 0.01mA / ± 0.05% FS. Low level cut-off programmable. |
| Span | 0.00001 / 199,999 with variable decimal position. |
| Offset | -99,999 / +199,999 units. |
| Update time | Four times per second. |
| Voltage drop | Max. 2.6V DC @ 20mA. |
| Relationship | Linear and square root calculation. |

Operational

Operator functions

| | |
|---------------------|--|
| Displayed functions | <ul style="list-style-type: none"> Top line: main display value. Bottom line: measuring unit and messages. Piegraph: 10 segments related to input signal. Actual sensor input value in mA. Displayed value at 0% of the input signal. Displayed value at 100% of the input signal. |
|---------------------|--|

displayed information

| | |
|------------|---|
| Digits | 5½ digits (height 26mm / 1"). |
| Units | m - mL - L - nL - M³ - nM³ - mg - g - kg - ton - gal - sgal - iganal - lb - bbl - cf - scf - p - rev - °C - °F - °K - % - mm - cm - mtr - inch - ft - mmwk - mmwc - cmwk - cmwc - mwk - mwc - inwc - ftwc - mbar - bar - psi - pH - mV - no unit. |
| Time units | /sec - /min - /hr - /day - no unit. |
| Decimals | 0 - 1 - 2 - 3 - 4 or 5. |

Ordering information

Standard configuration: Dogo-A-HB-PL-ZX.

| ordering information: | | D090 | -A | -HB | -PL | -Z _ |
|--|---|------|----|-----|-----|------|
| Sensor input signal | | | | | | |
| A | (o)4 - 20mA input. | | | | | |
| Panel mount front enclosure - IP66, IP67 (NEMA4X) | | | | | | |
| HB | Aluminum DIN 43700 / IEC 61554 front panel. | | | | | |
| Power supply | | | | | | |
| PL | Input loop powered from sensor signal 4 - 20mA. | | | | | |
| Other options | | | | | | |
| ZB | Backlight. | | | | | |
| ZX | No options. | | | | | |

The bold marked text contains the standard configuration.

Specifications are subject to change without notice.